


# Dynamic Single-Pixel Imaging on an Extended Field of View without Warping the Patterns (Supplementary Material)

Thomas Maitre<sup>1</sup>, Elie Bretin<sup>2</sup>, Romain Phan<sup>1</sup>, Nicolas Ducros<sup>1,3</sup>, and Michaël Sdika<sup>1</sup>

<sup>1</sup> Univ Lyon, INSA-Lyon, Universite Claude Bernard Lyon 1, UJM-Saint Etienne, CNRS, Inserm, CREATIS UMR 5220, U1294, F-69621, LYON, France

<sup>2</sup> Univ Lyon, INSA de Lyon, CNRS UMR 5208, Institut Camille Jordan, F-69621 Villeurbanne, France

<sup>3</sup> Institut universitaire de France (IUF), France

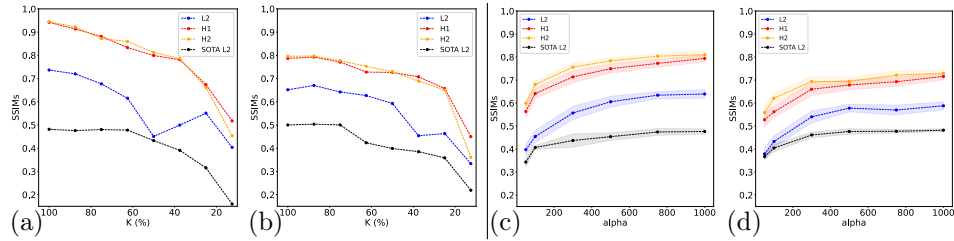

**Fig. 1.** Robustness of the proposed method. (a-b) SSIMs as a function of the number of measurement with known (Fig. 1a) and estimated motion (Fig. 1b). (c-d) SSIMs as a function of the noise level with known (Fig. 1c) and estimated motion (Fig. 1d). The shaded area represent the 95% confidence interval around the mean.